
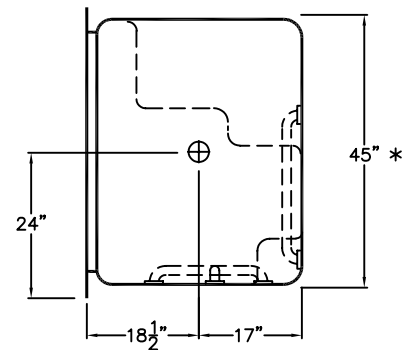

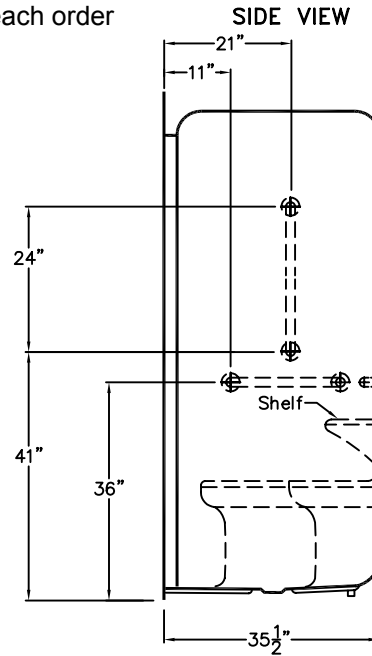


ACRYLIC ACCESSIBLE SHOWER 48" X 35.5"

Submittal Information; All accessories shown are optional
 Custom submittal forms completed with each order

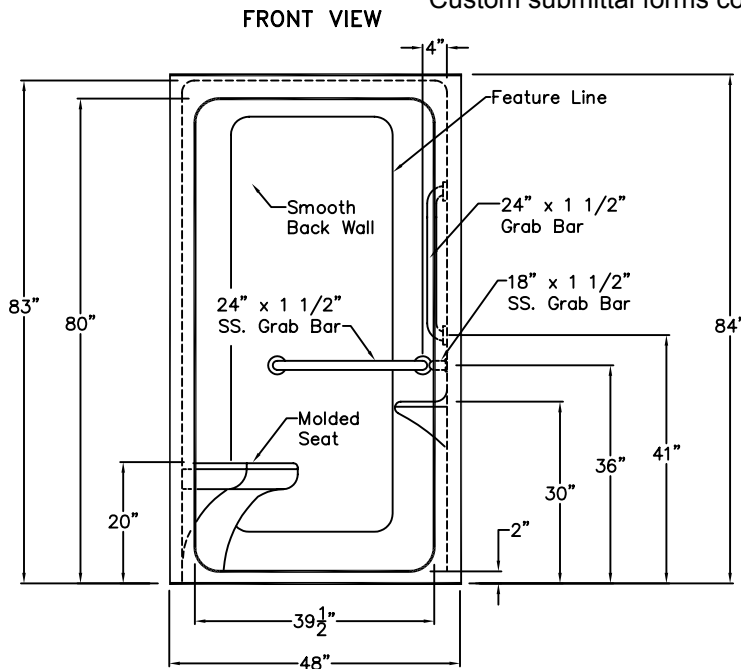

ROUGH IN DIMENSIONS: 48" x 36 1/2" x 84"
 * NOTE: THIS DIMENSION IS NOT TO SCALE. THIS DIMENSION INCLUDES NUTS/BOLTS, WOOD AND HARDWARE REQUIRED FOR ASSEMBLY.

DUE TO THE NATURE OF THE MATERIALS INVOLVED, UNIT DIMENSIONS MAY VARY ± 1/2 INCH.


Accessible Shower Stall

This shower enclosure shall be Accessibility Professionals Model #APTH4836BF2. The unit shall be molded from a single sheet of acrylic so as not to have any seams or joints. It shall meet ANSI Z124.2, NAHB, UPC and shall have the back side fire rating of "A" and a flame spread of less than 25. Unit is designed to meet FHA, HUD, and shall meet the requirements of most state and national standards on design for the disabled including Southern Building Code, Building Code. The unit shall have inside dimensions of 45" x 35 1/4" x 80 1/2", and the outside dimensions of 48" x 35 1/2" x 84".

The enclosure may be equipped with the following factory installed accessories:

- 1) One 24" x 1 1/2" diameter stainless steel horizontal grab bar on the back wall,
- 2) One 18" x 1 1/2" diameter stainless steel horizontal grab bar on the valve wall,
- 3) One 24" x 1 1/2" diameter stainless steel vertical grab bar on the valve wall, all with 1 1/2" clearance statute, mounted with stainless steel bolts and secured from the rear with 3" x 3", 11 guage metal backing plates,
- 4) Molded seat,
- 5) Smooth back wall, with no diamond pattern,
- 6) 2.0" Threshold.

Available options: 1) hand held shower set includes: hand set, 60" flex hose, swivel connector, vacuum breaker, brass nipple, lock nut and shower wall outlet), 2) pressure balance valve, 3) anti-bacterial shower curtain with hooks, 4) white shower curtain and hooks, 5) molded seat 6) recessed soap dish, 7) Nurses call box drilling, 8) Curtain rod, 9) Dome light,

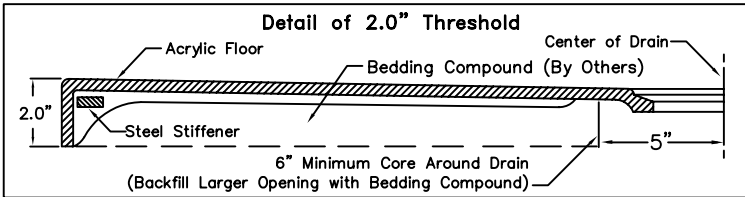

Model No.:	Drawing#:	H4836 BF 2.0 HBW HSW VSW MS Smooth
Approved by:	Date Approved:	Date: 7-17-96 Revised: 2-9-12
Rep.:	Wholesaler:	Quote No.: